

Mortise Function Lever Set




Model:

GL 8103



Diagram



Specification

- Finish: Brushed nickel and nickel
- Handle material: zinc alloy
- Lock faceplate material: zinc alloy
- Lock cylinder
- Key: 3 Brass Keys
- Door thickness: 35-50mm, special door thickness: 50-65mm
- Application range: Suitable for various kinds of wooden doors
- Standard backset 60mm
- Completely reversible

Finishing

M26D - Satin Chrome

PVD - Physical Vapor Deposition

Function

- Entrance

Mortise Lock Case




Model:

GL 8231



Diagram



Profile Cylinder with thumb turn




Model:


GL 8413



Diagram



Installation

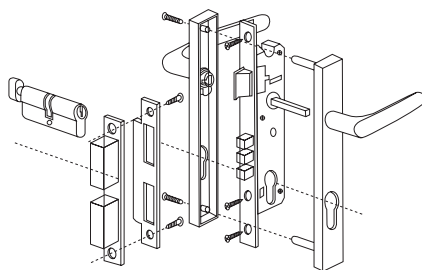

SIRM
CERTIFIED TO: ANSI/BHMA A 156.13:2005
Certification No: PC000360

Meets underwriter's laboratories criteria.
Specially designed for barrier free application.
Certified to ANSI/BHMA A 156.13:2005 Sirm approval, Grade 3.
Exceeds 200,000 cycles. Certification No: PC000360

Packing - Box pack

Stock Code	Packing	Weight
GL 8103	12 sets	15 kgs
GL 8231	12 sets	15 kgs
GL 8413	12 sets	15 kgs